
DP3425/Rev01 - DI

# GEOM6 / LS600 / PS15 Wall Bracket

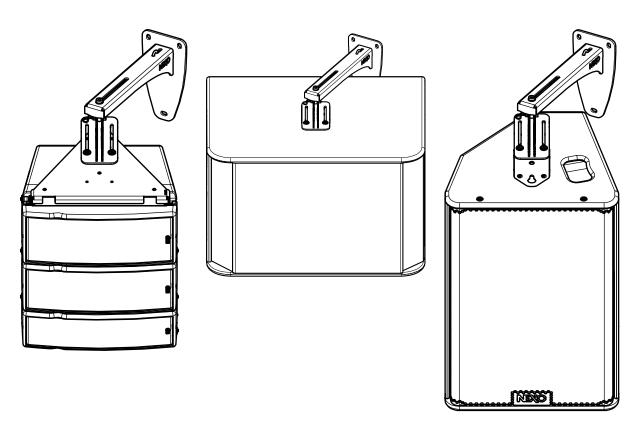

## **Contents:**

X1 (Arm)	X1 (Adapter)	X1	
X1	X2	X1	X2
		0	0
X1	X1	X1	X1
	9	0.0	


Weight: 2.8 kg / 6.2 lb



- Read this document before using.
- Keep this document.Observe all warnings and cautions.





#### **Dimensions:**




### **Adapter mounting**

- Connect the VNI-WS15 adapter to the GMT-LBUMP by using the M6x20 provided with the GMT-LBUMP
- Position the M6x20 screws in the oblong hole so that required vertical angle is obtained
- Remove 2 screws from the LS600 / PS15 and use the 2 screws and the 2 washers provided to fix the adapter.
- Please, do not push on the 2 screws while screwing them, to avoid disengaging the bolt that is inside the cabinet.







WARNING: Screws must be secured using Loctite 243<sup>™</sup>




- Keep this document.


- Observe all warnings and cautions.




## Tilt in vertical position with PS15

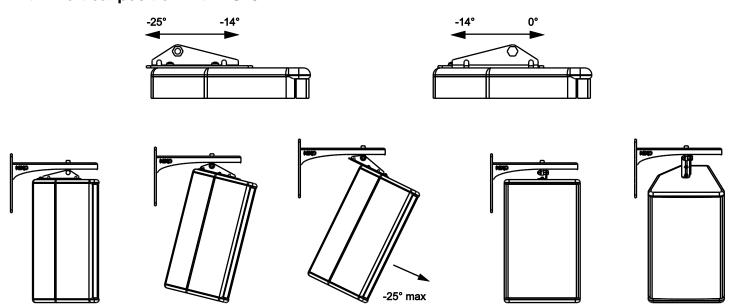


## Tilt in horizontal position with PS15

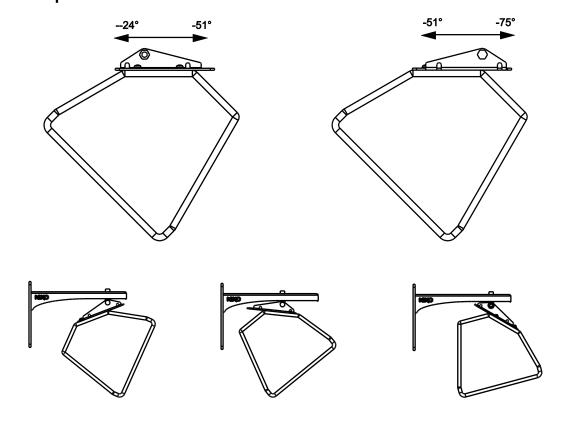










### Adapter / Arm mounting


For the wall mount of VNI-WS15, please select screws and mounting location supporting 4 times the system weight.

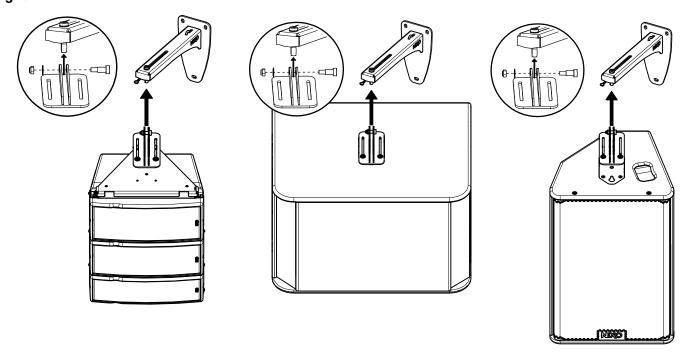

Tighten well to cancel any float between the arm and the adapter.


### Safety device


#### Use the parts provided

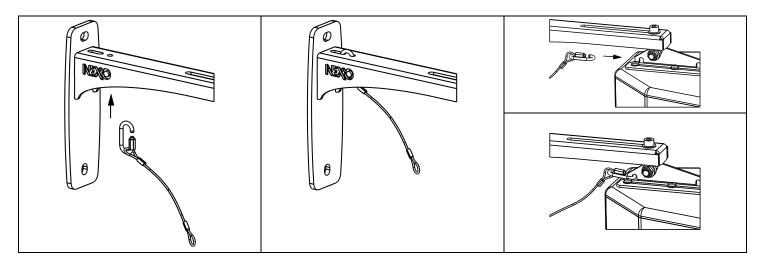

- NEXO cannot accept responsibility for accidents caused by any factor other than defects in this product itself.
- Please check the web site <u>nexo-sa.com</u> for the latest update.







- Observe all warnings and cautions.

