



APOLLO CCT 150


APOLLO LED CCT SPOT

(Bi-Color 2700K-6000K)


LAMPHEAD CONTENTS

- Lamp Housing (black color)
- 4-leaf Rotatable Barndoor with Safety Wire
- M.O. / P.O. Stirrup with Ø28mm (1-1/8 in.) Spigot
- AC Cable

DIMENSIONS (mm)

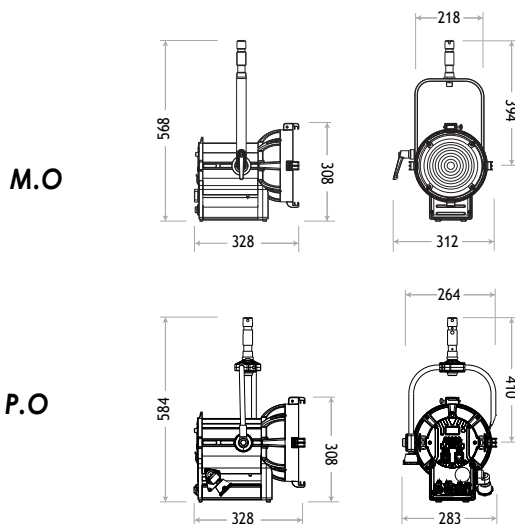

SPECTRUM

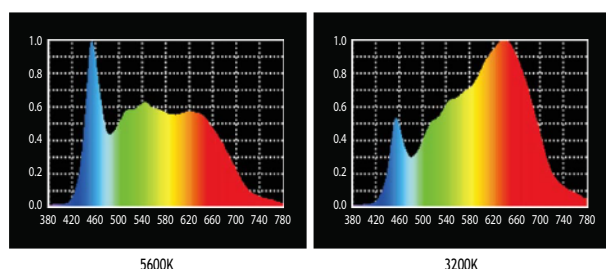

APOLLO CCT 150 (Bi-Color)

SPECIFICATIONS

Identity No.	L0015LFB (M.O.) LP015LFB (P.O.)
Max. Capacity	150W
Voltage	95 - 260V AC, 22-36V DC
Frequency	50Hz / 60Hz
Current	0.7A @220V AC 6.2A @24V DC
Fresnel Lens	Ø175mm
Color Temp.	Adjustable 2700K - 6000K
CRI	Average >95
TLCI	Average >95
Dimming Range	0-100%
Control	DMX / RDM
DMX Channel	3
LED Lifetime	50,000 Hrs (Estimated)
M.O. / P.O. Stirrup	with Ø28mm (1-1/8 in.) Spigot
Class / IP Rating	1 / IP 23
Max. Surface Temp.	60 °C
Max. Ambient Temp.	35 °C
Operating Range	+45° ~ 0° ~ -45°
Weight (Lamphead)	5.0 kg (M.O.) 6.0 kg (P.O.)

ACCESSORIES

Filter Frame
Safety Cable (for lamphead)

PHOTOMETRIC DATA

		APOLLO CCT 150			
		3m	5m	7m	9m
5600K					
Spot	Lux	11433	4116	2100	1270
15°	Beam Ø	0.79m	1.32m	1.84m	2.37m
Flood	Lux	2333	840	429	259
55°	Beam Ø	3.12m	5.21m	7.29m	9.37m
3200K					
Spot	Lux	8653	3115	1589	961
15°	Beam Ø	0.79m	1.32m	1.84m	2.37m
Flood	Lux	1913	689	351	213
55°	Beam Ø	3.12m	5.21m	7.29m	9.37m

HISTOGRAM

