

Overview

The new DXS15mkII capable of producing tight, thunderous low frequencies as low as 40Hz and a maximum SPL of 135dB, this updated model's optimized band-pass design and state-of-the-art DSP ensure the extremely high power output is focused, powerful, and distortion-free.



Features

- 15" powered subwoofer with 1020W class-D power amplifier
- High-output 15" woofer with a band-pass design cabinet for superior bass response and a maximum 135dB SPL
- 40Hz-150Hz frequency range is ideal for small- to medium-sized rooms
- Built-in D-XSUB processing allows you to extend the frequency response even lower
- Plywood cabinet is durable and acoustically optimized for maximum sound quality
- Cardioid mode for bass management onstage
- Selectable X-OVER (80/100/120 Hz)
- M20 and Ø35 mm dual pole sockets
- Optional Speaker Wheels (SPW-1) and Speaker Cover (SPCVR-DXS152)

Specifications

General Specifications

System Type	Powered subwoofer, Band-pass type	
Components	15" cone, 2.5" voice coil, Ferrite Magnet	
Frequency Range	(-10dB)	40Hz-150Hz
Output Power*1	Dynamic	1020W
	Continuous	800W
Maximum SPL (1m, on axis)	135dB SPL	
Processing	D-XSUB: BOOST, XTD LF, NORMAL	
Controls	LEVEL, POLARITY, LPF, X-OVER, D-XSUB, CARDIOID, THROUGH/HPF POST, FRONT LED DISABLE, POWER	
Cooling	Natural convection	
Power Requirements	100V-240V, 50Hz/60Hz	
1/8 Power Consumption	100W	
Pole Socket	35mm (depth 80mm) & M20 (threaded depth 25mm)	
Handle	Side × 2	
Material, Finish, Color	Wood, Durable Polyurea Coating, Black	
Dimensions (W x H x D)	480mm x 611mm x 614mm (18.9" x 24.06" x 24.17")	
Net Weight	36.0kg (79.4lbs)	
Optional Accessories	SPCVR-DXS152, SPW-1	


*1 Power rating (120V, 25°C). This is total value of individual output power.

Input/Output Specifications

Connectors	Input	INPUT: XLR-3-31 × 2
	Output	THRU: XLR3-32 × 2 (Parallel with INPUT)
Input Impedance	INPUT1: 10kΩ	
Input Sensitivity (LEVEL: Maximum)	INPUT1: +1 dBu	
Input Sensitivity (LEVEL: Center)	INPUT1: +11 dBu	
Maximum Input Level	INPUT1: +24 dBu	

Dimensions

Unit: mm (inch)

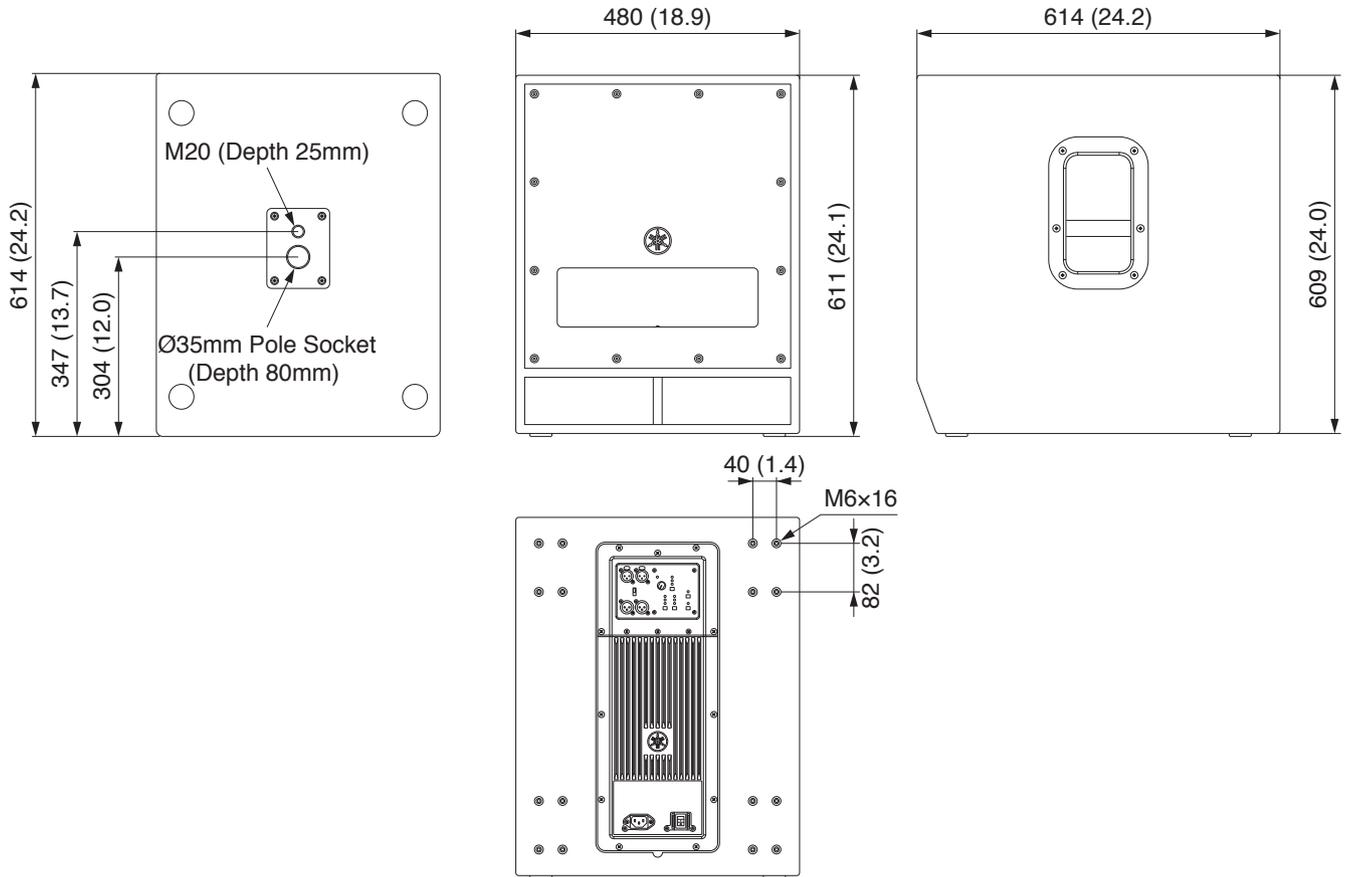

Options

- Speaker Cover SPCVR-DXS152
- Wheel Kit SPW-1


Architectural and Engineering Specifications

The Yamaha DXS15mkII Powered Subwoofer shall be a band-pass type subwoofer system incorporating a single 15" cone with a 2.5" voice coil. The subwoofer shall incorporate a class-D amplifier (1020 watts dynamic/800 watts continuous) and DSP functions such as FIR-X tuning (linear phase FIR filters) and D-XSUB (multi-band compression). The amplifier section shall be cooled by natural convection.


The DXS15mkII Powered Subwoofer shall meet the following performance criteria: Maximum SPL shall be 135 dB at 1 meter, frequency response shall be 40 Hz to 150 Hz at 10 dB below rated sensitivity.

The subwoofer shall have two XLR3-31 connectors for input and two XLR3-32 connectors for Through or HPF POST output. The cabinet shall be constructed of plywood with LINE-X® finish. 35 mm and M20 pole sockets shall be provided. Dimensions shall be 480 (W) x 611 (H) x 614 (D) mm. Weight shall be no more than 36.0 kg.

Block Diagrams

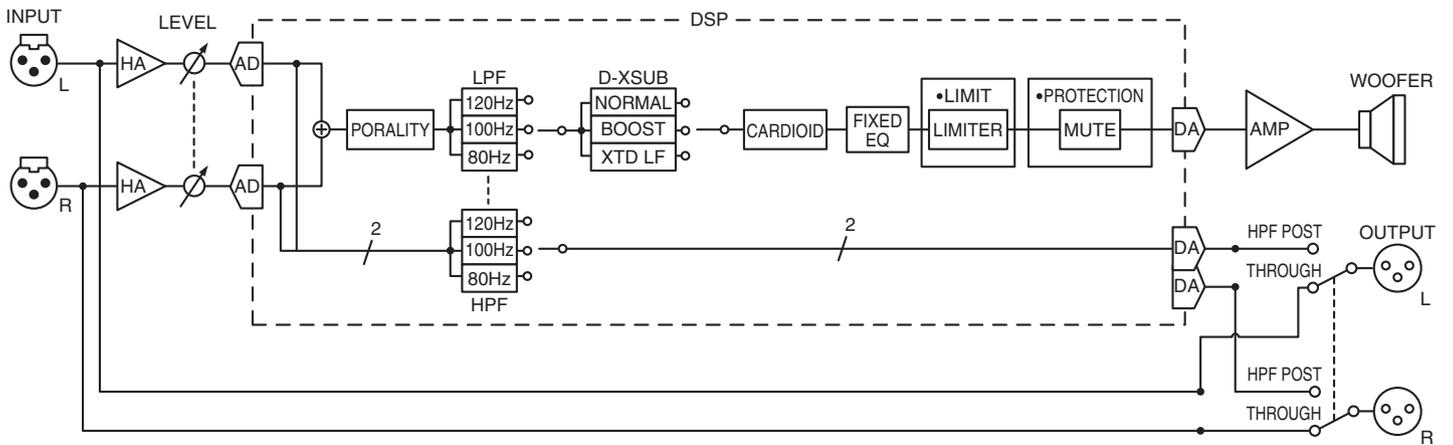

Frequency Response

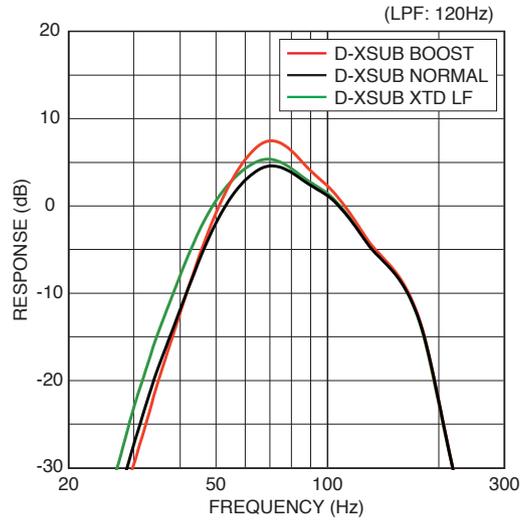

*All information subject to change without notice.

*All trademarks and registered trademarks are property of their respective owners.

Created in January, 2018