



APOLLO CCT 300


APOLLO LED CCT SPOT

(Bi-Color 2700K-6000K)


LAMPHEAD CONTENTS

- Lamp Housing (black color)
- 4-leaf Rotatable Barndoor with Safety Wire
- M.O. / P.O. Stirrup with Ø28mm (1-1/8 in.) Spigot
- AC Cable

DIMENSIONS (mm)

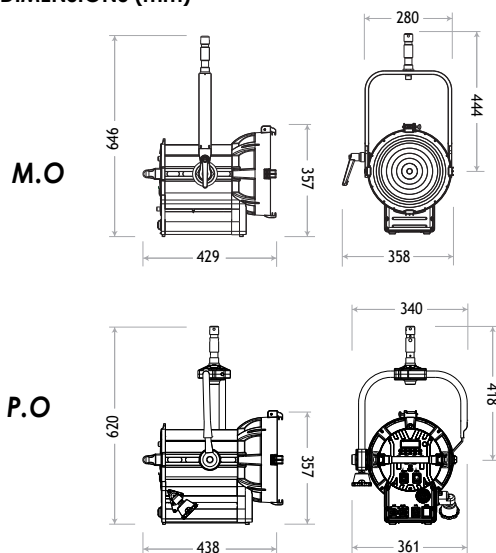

SPECTRUM

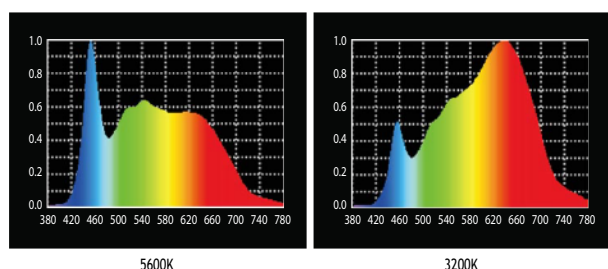

APOLLO CCT 300 (Bi-Color)

SPECIFICATIONS

Identity No.	L0030LFB (M.O.) LP030LFB (P.O.)
Max. Capacity	300W
Voltage	95 - 260V AC, 22-36V DC
Frequency	50Hz / 60Hz
Current	1.4A @220V AC 12.5A @24V DC
Fresnel Lens	Ø250mm
Color Temp.	Adjustable 2700K - 6000K
CRI	Average >95
TLCI	Average >95
Dimming Range	0-100%
Control	DMX / RDM
DMX Channel	3
LED Lifetime	50,000 Hrs (Estimated)
M.O. / P.O. Stirrup	with Ø28mm (1-1/8 in.) Spigot
Class / IP Rating	1 / IP 23
Max. Surface Temp.	60 °C
Max. Ambient Temp.	35 °C
Operating Range	+45° ~ 0° ~ -45°
Weight (Lamphead)	12.0 kg (M.O.) 13.0 kg (P.O.)

ACCESSORIES

Filter Frame
 Safety Cable (for lamphead)

PHOTOMETRIC DATA

		APOLLO CCT 300			
		3m	5m	7m	9m
5600K					
Spot	Lux	25319	9115	4651	2813
15°	Beam Ø	0.79m	1.32m	1.84m	2.37m
Flood	Lux	4864	1751	893	540
55°	Beam Ø	3.12m	5.21m	7.29m	9.37m
3200K					
Spot	Lux	19172	6902	3521	2130
15°	Beam Ø	0.79m	1.32m	1.84m	2.37m
Flood	Lux	3581	1289	658	398
55°	Beam Ø	3.12m	5.21m	7.29m	9.37m

HISTOGRAM

