



APOLLO 500D
Daylight M.O




APOLLO 500T
Tungsten P.O

APOLLO LED SPOT (Daylight/Tungsten)


LAMPHEAD CONTENTS

- Lamp Housing
- 4-leaf Rotatable Barndoor with Safety Wire
- M.O. / P.O. Stirrup with Ø28mm (1-1/8 in.) Spigot
- AC Cable

DIMENSIONS (mm)

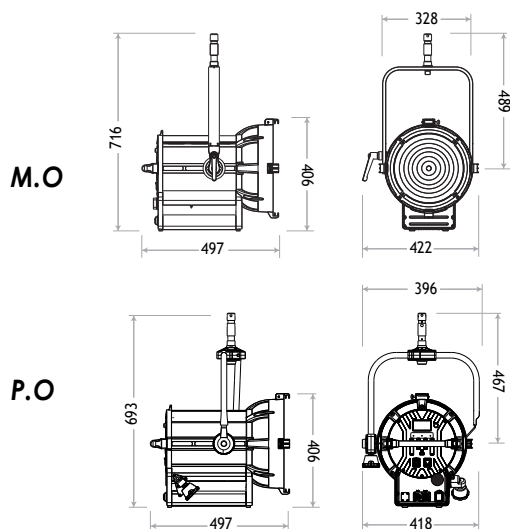

SPECTRUM

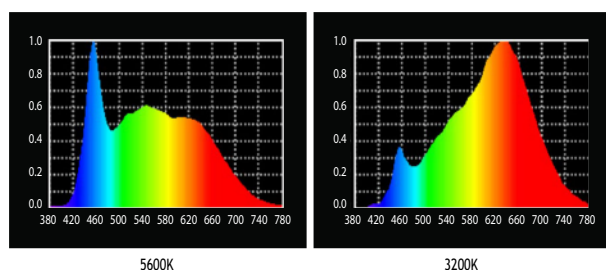

APOLLO 500D (Daylight) **APOLLO 500T (Tungsten)**


SPECIFICATIONS

Identity No.	L0050LFD (Daylight / M.O.)
	LP050LFD (Daylight / P.O.)
	L0050LFT (Tungsten / M.O.)
	LP050LFT (Tungsten / P.O.)
Max. Capacity	500W
Voltage	95 - 260V AC
Frequency	50Hz / 60Hz
Current	2.3A @220V AC
Fresnel Lens	Ø250mm
Color Temp.	5600K or 3200K
CRI	Average >95
TLCI	Average >95
Dimming Range	0-100%
Control	DMX / RDM
DMX Channel	3
LED Lifetime	50,000 Hrs (Estimated)
M.O. / P.O. Stirrup	with Ø28mm (1-1/8 in.) Spigot
Class / IP Rating	1 / IP 23
Max. Surface Temp.	60 °C
Max. Ambient Temp.	35 °C
Operating Range	+45° ~ 0° ~ -45°
Weight (Lamphead)	15.0 kg (M.O.)
	16.0 kg (P.O.)

ACCESSORIES

Filter Frame
Safety Cable (for lamphead)

PHOTOMETRIC DATA

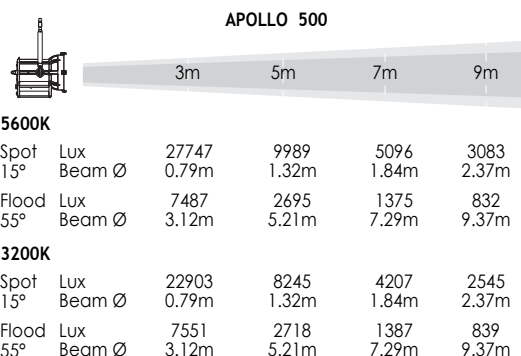

HISTOGRAM

